

1
2
3
4d
5
6
7
8
9
10
11



SILVER-LINE® Quicktest Gauge "Intertest" • IP65

- for measuring of internal grooves, bore etc.
- water and coolant proof acc. to DIN 40050 / IEC 60529
- tungsten carbide measuring contact points
- with rack gear
- with moveable contact arm
- with tolerance fingers
- incl. operation manual

ART N° 240530



D = form of measuring contact points

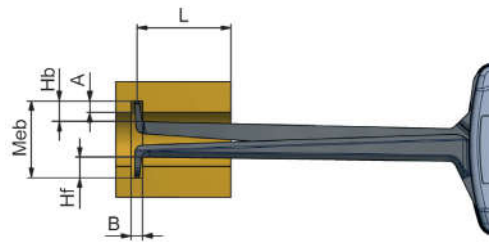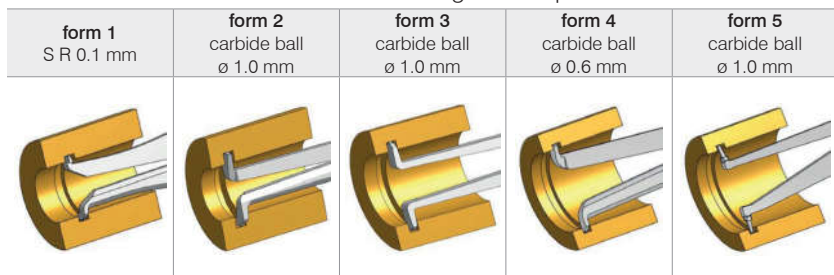


ART N°	mm	mm	form	L mm	A mm	B mm	Hb mm	Hf mm	F min. N	F max. N	max. mm		
240530	2.5 - 12.5	0.005	1	35	0.7	0.4	0.9	0.9	0.8	1.2	0.015	0.320	inclusive
240532	5.0 - 15.0	0.005	4	35	2.3	0.8	2.5	2.5	0.8	1.2	0.015	0.320	inclusive

SILVER-LINE® Quicktest Gauge "Intertest" • IP65

- for measuring of internal grooves, bore etc.
- water and coolant proof acc. to DIN 40050 / IEC 60529
- tungsten carbide measuring contact points
- with steel filament drive
- with moveable contact arm
- with tolerance fingers
- incl. operation manual

ART N° 240539

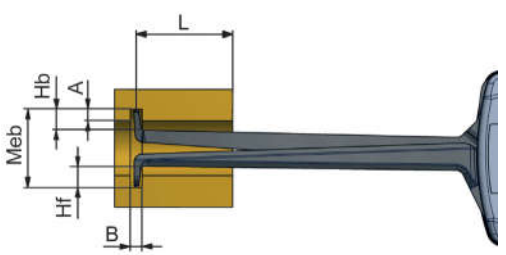

ART N°	mm	mm	form	L mm	A mm	B mm	Hb mm	Hf mm	F min. N	F max. N	max. mm		
240539	10 - 30	0.01	2	85	5.2	1.2	5.4	5.4	1.1	1.6	0.03	0.450	inclusive
240540	20 - 40	0.01	3	85	7.0	1.2	7.3	7.3	1.1	1.6	0.03	0.460	inclusive
240541	30 - 50	0.01	3	85	7.0	1.2	7.3	7.3	1.1	1.6	0.03	0.460	inclusive
240542	40 - 60	0.01	5	85	8.3	1.2	12.2	12.2	1.1	1.6	0.03	0.470	inclusive
240543	50 - 70	0.01	5	85	8.3	1.2	12.2	12.2	1.1	1.6	0.03	0.480	inclusive
240544	60 - 80	0.01	5	85	8.3	1.2	12.2	12.2	1.1	1.6	0.03	0.490	inclusive
240545	70 - 90	0.01	5	85	8.3	1.2	12.2	12.2	1.1	1.6	0.03	0.500	inclusive
240546	80 - 100	0.01	5	85	8.3	1.2	12.2	12.2	1.1	1.6	0.03	0.510	inclusive