



„Absolute“ Electr. Digital Dial Indicator • IP54

**NEW**

- top model for industry purposes
- with optical tolerance alarm by LED signal
- with Bluetooth data out put
- spray water proof, acc. to 40050 / IEC 60529
- mechanical parts in stainless steel, hardened, IP51 protected
- housing IP54 protected, front plate made of plastic
- large LCD display with clear reading, 10 mm digit height
- On/Off button, LED signal for data transmitting and tolerance range
- with PRESET/ORIGIN/ABS/INC-system
- mm/inch switchable, from up 25 mm with lifting device
- incl. 3 V battery (type CR2032, art.-no. 2002093), with operation manual

**Options**

- data transfer via cable, art.-no. 3420195, see page 304
- data transfer via WiFi, art.-no. 2040102, see page 304
- data transfer via Bluetooth, art.-no. 2023106, see page 304




ART N° 240282

ART N° 240280

ART N° 240281



from up 25 mm incl. lifting device

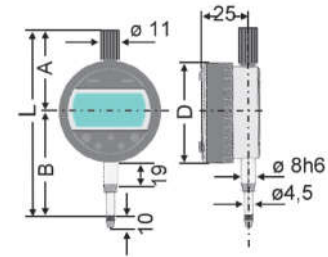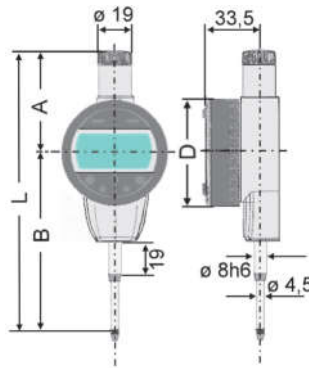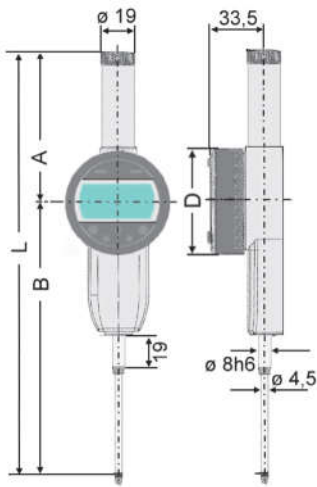

	<b>UNIT</b>	<b>INOX</b>	Bluetooth	ABSOLUTE
<b>ORIGIN</b>				<b>IP 54</b>
<b>NORM</b>	<b>CE</b>	<b>TC</b>	<b>WARRANTY 3 YEARS</b>	

ART N°	mm / inch	mm / inch	mm	max. mm	L mm	A mm	B mm	D mm	KG	ART N° CC
240280	12.5 / 0.5	0.01 / 0.0005	0.002	0.01	129.2	60.2	69	60.1	0.169	2494200
240285	12.5 / 0.5	0.001 / 0.00005	0.002	0.004	129.2	60.2	69	60.1	0.169	2494200
240281	25.0 / 1.0	0.01 / 0.0005	0.002	0.01	159.2	57.7	101.5	60.1	0.280	2494201
240286	25.0 / 1.0	0.001 / 0.00005	0.002	0.004	159.2	57.7	101.5	60.1	0.280	2494201
240282	50.0 / 2.0	0.01 / 0.0005	0.002	0.015	236.2	83.7	152.5	60.1	0.340	2494202
240287	50.0 / 2.0	0.001 / 0.00005	0.002	0.005	236.2	83.7	152.5	60.1	0.340	2494202

1  
2  
3  
4a  
5  
6  
7  
8  
9  
10  
11