

1
2
3a
4
5
6
7
8
9
10
11


DIGI PLUS-LINE **Electr. Digital Micrometer** **V_{SPEED}** • IP67
DIN 863

- water and coolant proof acc. to DIN 40050 / IEC 60529
- with 2 mm spindle feed for quick measuring
- with Sylvac electronic • with Proximity data output
- connection proximity USB / RS232 / digimatic (optional choice)
- large LCD display, clear reading, digit height 7 mm
- frame lacquered, with insulation plates, carbide surfaces, lapped
- automatic turn on by movement of the measuring spindle, mode / set button
- zero setting at any position, switching to sleep mode after 20 minutes
- storage of position in the sleep mode, mm/inch switchable
- non swiveling measuring spindle, measuring range 0-102 mm, means total measuring range captured with 3 micrometers
- switchable measuring force 5N/10N art.-no.: 230101, meas.-force 10 N at art.-no.: 230102 - 230103
- incl. 1x 3 V battery (type CR2032, art.-no. 2002093), with operation manual
- incl. calibration certificate



Option

- data transfer via cable, art.-no. 2023101, see page 304
- data transfer via WiFi, art.-no. 2023105, see page 304




ART NO	mm / inch	mm / inch	ø mm	mm	A mm	B mm	D mm	L mm	max. mm	KG	CC
230101	0 - 30 / 0 - 1.2	0.001 / 0.00005	28	2	8	27.5	3.5	42	0.003	0.280	inclusive
230102	30 - 66 / 1.2 - 2.6	0.001 / 0.00005	28	2	9	43	3.5	78	0.004	0.450	inclusive
230103	66 - 102 / 2.6 - 4.0	0.001 / 0.00005	28	2	10	60	3.5	114	0.005	0.580	inclusive

DIGI PLUS-LINE **Electr. Digital Micrometer** • IP54
DIN 863

NEW

- top model for industry purposes
- with optical tolerance alarm by LED signal
- with data output (micro USB)
- spray water proof acc. to DIN 40050 / IEC 60529
- sturdy quality, frame lacquered, with insulation plates
- large LCD display with clear reading, 10 mm digit height
- friction ratchet made from aluminium
- carbide surfaces, lapped, spindle hardened and ground
- with tolerance preset, SET button
- On/Off button, autom. power off
- locking lever for quick precise fixing
- with ratchet for constant measuring pressure
- incl. 1x 3 V battery (type CR2032, art.-no. 2002093), with operation manual
- from up 25 mm with setting gauge

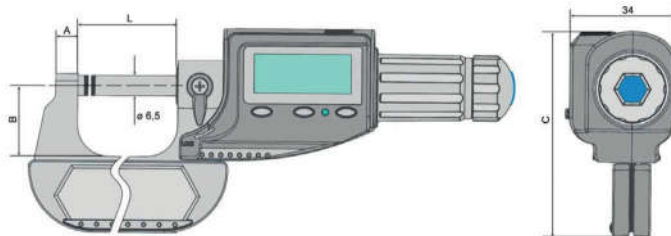

Options

- data transfer via cable, art.-no. 3420195, see page 304
- data transfer via WiFi, art.-no. 2040102, see page 304
- data transfer via Bluetooth, art.-no. 209009, see page 304



ART NO	mm / inch	mm / inch	ø mm	mm	A mm	B mm	C mm	L mm	max. mm	KG	ART NO CC
231231	0 - 25 / 0 - 1	0.001 / 0.00005	21	0.5	7	22.5	64.7	31.5	0.003	0.195	2394000
231232	25 - 50 / 1 - 2	0.001 / 0.00005	21	0.5	8	31	84.4	56.5	0.003	0.288	2394001
231233	50 - 75 / 2 - 3	0.001 / 0.00005	21	0.5	9	44	97.9	81.5	0.004	0.369	2394001
231234	75 - 100 / 3 - 4	0.001 / 0.00005	21	0.5	9	56	115.9	107.1	0.004	0.496	2394001