


1
2
3a
4
5
6
7
8
9
10
11

DIGI PLUS-LINE **Electr. Digital Micrometer • IP65**
DIN 863

- water and coolant proof acc. to DIN 40050 / IEC 60529
- with USB data output
- sturdy quality, frame lacquered, with insulation plates
- large LCD display, clear reading, digit height 7 mm
- carbide surfaces, lapped, spindle hardened and ground
- On button, automatic shutdown, zero setting at any position
- mm/inch switchable, ABS/INC measuring system
- locking lever for quick and precise fixing
- with ratchet for constant measuring pressure
- incl. 1x 3 V battery (type CR2032, art.-no. 2002093), with operation manual
- from up 25 mm with setting gauge

Options



- data transfer via cable, art.-no. 3420195, see page 304
- data transfer via WiFi, art.-no. 2040102, see page 304
- data transfer via Bluetooth, art.-no. 209009, see page 304

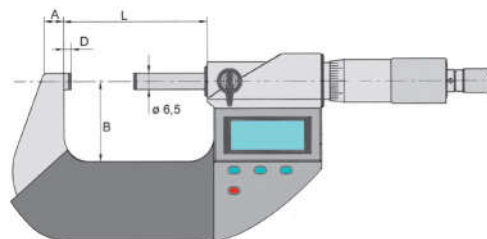

ART NO	mm / inch	mm / inch	ø mm	mm	A mm	B mm	D mm	L mm	max. mm	KG	ART NO CC
230130	0 - 25 / 0 - 1	0.001 / 0.00005	18	0.5	9	24	3.5	35	0.003	0.310	2394000
230131	25 - 50 / 1 - 2	0.001 / 0.00005	18	0.5	9	32	3.5	60	0.003	0.394	2394001
230132	50 - 75 / 2 - 3	0.001 / 0.00005	18	0.5	12	47	3.5	86	0.004	0.518	2394001
230133	75 - 100 / 3 - 4	0.001 / 0.00005	18	0.5	14	60	3.5	111	0.004	0.700	2394001

DIGI PLUS-LINE **Electr. Digital Micrometer**
DIN 863

- large LCD display with clear reading, digit height 7 mm
- frame lacquered, with insulation plates
- carbide surfaces, lapped, spindle hardened and ground
- autom. shutdown, zero setting at any position
- mm/inch switchable, without data output
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure
- incl. 1x 1.5 V battery (type LR44, art.-no.: 2020192/B), with operation manual
- from up 25 mm with setting gauge

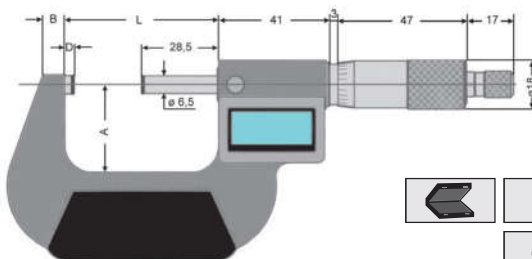

ART NO	mm / inch	mm / inch	ø mm	mm	A mm	B mm	D mm	L mm	max. mm	KG	ART NO CC
231088	0 - 25 / 0 - 1	0.001 / 0.00005	18	0.5	24.0	6	3.0	32.0	0.002	0.275	2394001
231089	25 - 50 / 1 - 2	0.001 / 0.00005	18	0.5	32.0	8	3.0	57.0	0.002	0.310	2394001
231090	50 - 75 / 2 - 3	0.001 / 0.00005	18	0.5	45.0	8	3.0	82.0	0.003	0.440	2394001
231091	75 - 100 / 3 - 4	0.001 / 0.00005	18	0.5	57.0	10	3.0	107.0	0.003	0.560	2394001
231092	100 - 125 / 4 - 5	0.001 / 0.00005	18	0.5	70.0	10	3.0	133.0	0.003	0.690	2394002
231093	125 - 150 / 5 - 6	0.001 / 0.00005	18	0.5	82.0	12	3.0	158.0	0.003	0.755	2394002