

**SILVER-LINE** Micrometer  
DIN 863


- with special measuring faces
- drum and sleeve matt chrome finish
- frame hammer blow grey lacquered
- with insulation plates
- carbide surfaces, finely ground
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure



ART No 232910



ART No 232921

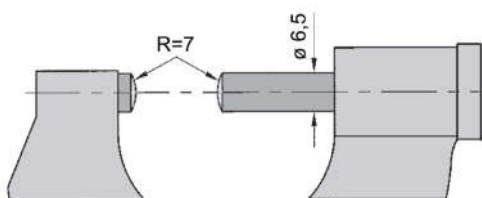

ART No	ART No					spindle-ø			ART No
type A	type B	mm	mm	ø mm	mm	mm	mm	KG	CC
232910	232921	0 - 25	0.01	20	0.5	6.5	0.003	0.420	2394000
232911	232922	25 - 50	0.01	20	0.5	6.5	0.003	0.530	2394000

**SILVER-LINE** Micrometer  
DIN 863

- with 30° and 60° pointed measuring faces
- drum and sleeve matt chrome finish
- frame hammer blow grey lacquered
- with insulation plates
- carbide surfaces, finely ground
- anvil length 15 mm
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure



ART No					measuring surfaces	spindle-ø			ART No
	mm	mm	ø mm	mm		mm	mm	KG	CC
230065	0 - 25	0.01	20	0.5	30° / R = 0.4	6.5	0.003	0.540	2394000
230066	25 - 50	0.01	20	0.5	30° / R = 0.4	6.5	0.003	0.660	2394000
230067	50 - 75	0.01	20	0.5	30° / R = 0.4	6.5	0.004	0.800	2394000
230068	75 - 100	0.01	20	0.5	30° / R = 0.4	6.5	0.004	0.940	2394000
230075	0 - 25	0.01	20	0.5	60° / R = 0.4	6.5	0.003	0.540	2394000
230076	25 - 50	0.01	20	0.5	60° / R = 0.4	6.5	0.003	0.660	2394000
230077	50 - 75	0.01	20	0.5	60° / R = 0.4	6.5	0.004	0.800	2394000
230078	75 - 100	0.01	20	0.5	60° / R = 0.4	6.5	0.004	0.940	2394000

Other measuring forms for art.-no. 230065 - 230068 are available on request, 15° / 20° / 45°

Suitable setting gauges are on page 102