



DIGI PLUS-LINE **Electr. Digital Depth Gauge**
workshop grade

- modern design, lightweight model
- made of anodized hard aluminium
- with exchangeable measuring tips (M2.5)
- with 3 measuring bridges with different length
- LCD display with clear reading, digit height 10 mm
- incl. hardened measuring tips with M2.5 thread, exchangeable
- On/Off button, mm/inch switchable, zero setting at any position
- slides perfectly because of double-prismatic-lead
- rail and electronic housing made of anodized aluminium
- incl. 1x 1.5 V battery (type LR44, art.-no.: 2020192/B) with operation manual and hexagon-key

Options

- art.-no. 220890 measuring bridge, 150 mm, anodized aluminium
- art.-no. 220891 measuring bridge, 300 mm, anodized aluminium
- art.-no. 220892 measuring bridge, 450 mm, anodized aluminium
- other measuring tips with M2.5 thread, please follow on page 141

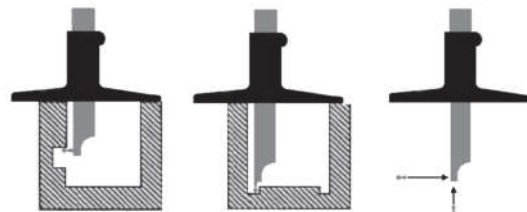



ART NO	mm / inch	mm / inch	mm	max. mm	mm	KG	ART NO CC
220880	300 / 12	0.01 / 0.0005	0.01	0.04	150 / 300 / 450	0.410	2294870
220881	500 / 20	0.01 / 0.0005	0.01	0.05	150 / 300 / 450	0.505	2294871
220882	800 / 32	0.01 / 0.0005	0.01	0.06	150 / 300 / 450	0.820	2294872

DIGI PLUS-LINE **Electr. Digital Depth Gauge**
workshop grade

- especially for narrow bore depth
- with round depth measuring bar
- modern design, lightweight model
- made of anodized hard aluminium
- with exchangeable measuring tips (M2.5)
- with exchangeable disc inserts
- incl. 2 measuring bridges with different length
- LCD display with clear reading, digit height 10 mm
- incl. hardened measuring tips with M2.5 thread, exchangeable
- incl. plate insert with ø 10 mm with measuring rods-ø 4 mm
- incl. plate insert with ø 20 mm with measuring rods-ø 6 mm
- all sliding parts slide in plastic bearing double prism guide
- rail and electronics housing made of aluminium, oxide-coated
- On/Off button, mm/inch switchable, zero setting at any position
- incl. 1x 1.5 V battery (type LR44, art.-no.: 2020192/B) with operation manual and hexagon-key
- further probe tips with M2.5 thread see page 141

Options

- art.-no. 220893 measuring bridge, 550 mm, duraluminium
- art.-no. 220894 measuring bridge, 750 mm, duraluminium
- art.-no. 220895 measuring bridge, 950 mm, duraluminium
- other measuring tips with M2.5 thread, please follow on page 141

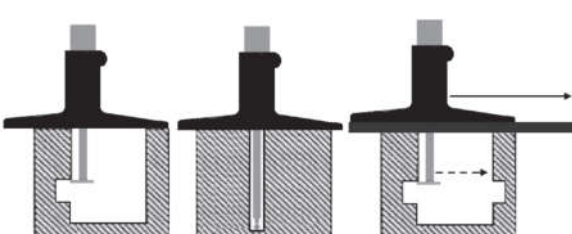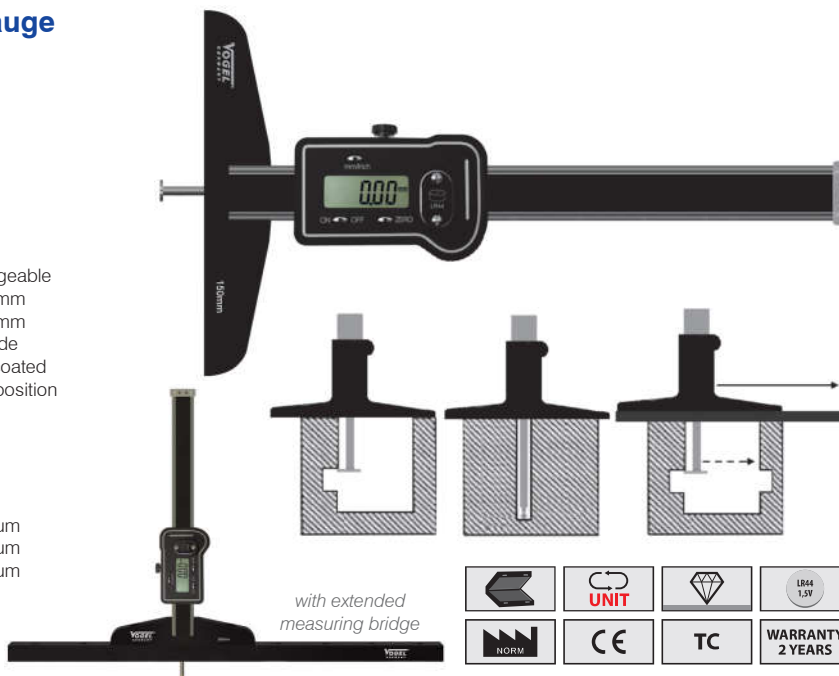

ART NO	mm / inch	mm / inch	mm	max. mm	meas.-beam-ø mm	mm	KG	ART NO CC
220840	200 / 8	0.01 / 0.0005	0.01	0.03	4	150/350	0.355	2294870
220841	300 / 12	0.01 / 0.0005	0.01	0.04	4	150/350	0.390	2294870
220842	500 / 20	0.01 / 0.0005	0.01	0.05	6	150/350	0.475	2294871
220843	800 / 32	0.01 / 0.0005	0.01	0.06	6	150/350	0.780	2294872