



"Absolute" Electr. Digital Depth Caliper • IP54

DIN 862

- top model for industry purposes
- with glass rail for more accuracy
- spray water proof acc. to DIN 40050 / IEC 60529
- with **VOCOM-S** duo data output (connectivity also for Digimatic measuring devices)

- sturdy quality, stainless steel, hardened
- large LCD display with clear reading, 9 mm digit height
- surface finely ground and lapped, with fixing screw
- On/Off button, with „ORIGIN“ system
- mm/inch switchable, zero setting at any position
- incl. 1x 3 V battery (type CR2032, art.-no.: 2002093), with operation manual

Options

- data transfer via cable, art.-no. 2420194, see page 304
- data transfer via WiFi, art.-no. 2040101, see page 304
- data transfer via Bluetooth, art.-no. 2023106 + 209000, see page 304



ART N°	type	mm / inch	mm / inch	mm	mm	type / size of measuring surface mm	KG	ART N° CC
220251	C	150 / 6	0.01 / 0.0005	0.02	100	5.5	0.175	2294101
220252		200 / 8	0.01 / 0.0005	0.03	100	5.5	0.215	2294101
220253		300 / 12	0.01 / 0.0005	0.03	150	5.5	0.280	2294101
220221	E	150 / 6	0.01 / 0.0005	0.02	100	20.5 x 6.0/3.5	0.175	2294101
220222		200 / 8	0.01 / 0.0005	0.03	100	20.5 x 6.0/3.5	0.215	2294101
220223		300 / 12	0.01 / 0.0005	0.03	150	20.5 x 6.0/3.5	0.280	2294101
220261	F	150 / 6	0.01 / 0.0005	0.02	100	Ø 1.5 / 7	0.175	2294101
220262		200 / 8	0.01 / 0.0005	0.03	100	Ø 1.5 / 7	0.215	2294101
220263		300 / 12	0.01 / 0.0005	0.03	150	Ø 1.5 / 7	0.280	2294101
220271	D	150 / 6	0.01 / 0.0005	0.02	100	6 / 3.5	0.175	2294101
220272		200 / 8	0.01 / 0.0005	0.03	100	6 / 3.5	0.215	2294101
220273		300 / 12	0.01 / 0.0005	0.03	150	7 / 3.5	0.280	2294101




Electr. Digital Depth Caliper • IP54

DIN 862

- standard model for industry and craft
- with glass rail for more accuracy
- spray water proof acc. to DIN 40050 / IEC 60529

- sturdy quality, stainless steel, hardened
- large LCD display with clear reading, 9 mm digit height
- stainless, hardened, with fixing screw
- On/Off button
- mm/inch switchable
- zero setting at any position
- incl. 1x 3 V battery (type CR2032, art.-no.: 2002093), with operation manual

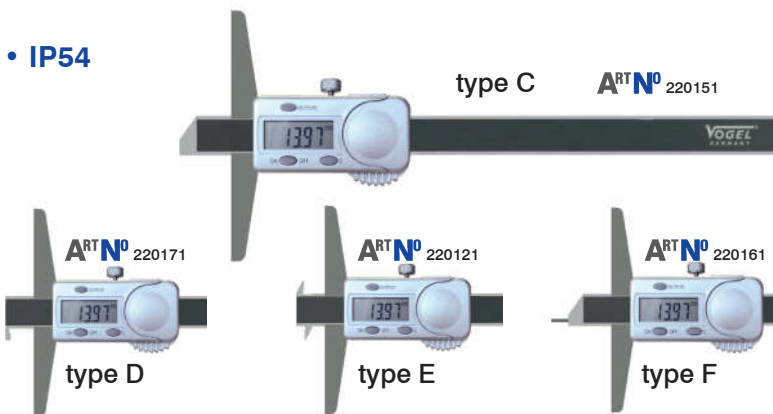

ART N°	type	mm / inch	mm / inch	mm	mm	type / size of measuring surface mm	KG	ART N° CC
220151	C	150 / 6	0.01 / 0.0005	0.02	100	5.5	0.175	2294101
220152		200 / 8	0.01 / 0.0005	0.03	100	5.5	0.215	2294101
220153		300 / 12	0.01 / 0.0005	0.03	150	5.5	0.280	2294101
220121	E	150 / 6	0.01 / 0.0005	0.02	100	20.5 x 6.0/3.5	0.175	2294101
220122		200 / 8	0.01 / 0.0005	0.03	100	20.5 x 6.0/3.5	0.215	2294101
220123		300 / 12	0.01 / 0.0005	0.03	150	20.5 x 6.0/3.5	0.280	2294101
220161	F	150 / 6	0.01 / 0.0005	0.02	100	Ø 1.5 / 7	0.175	2294101
220162		200 / 8	0.01 / 0.0005	0.03	100	Ø 1.5 / 7	0.215	2294101
220163		300 / 12	0.01 / 0.0005	0.03	150	Ø 1.5 / 7	0.280	2294101
220171	D	150 / 6	0.01 / 0.0005	0.02	100	6 / 3.5	0.175	2294101
220172		200 / 8	0.01 / 0.0005	0.03	100	6 / 3.5	0.215	2294101
220173		300 / 12	0.01 / 0.0005	0.03	150	7 / 3.5	0.280	2294101