

1

2a

3

4

5

6

7

8

9



10

11

DIGI PLUS-LINE **Electr. Digital Caliper • IP67**
DIN 862

- professional model for high standards
- water and coolant proof acc. to DIN 40050 / IEC 60529
- with Sylvac electronic, with proximity data output

- proximity USB / RS232 / wireless (available as option)
- mechanic in stainless steel, hardened
- LCD display with clear reading, 7 mm digit height
- jaws finely ground and lapped
- smart inductive sensor (S.I.S.):
 - autom. On/Off, autom. stand-by mode
 - ORIGIN saved
- zero setting at any position, SET-button, MODE-button
- unit of measurement switchable mm/inch
- incl. 1x 3 V battery (type CR2032, art.-no.: 2002093), with operation manual
- incl. calibration certificate

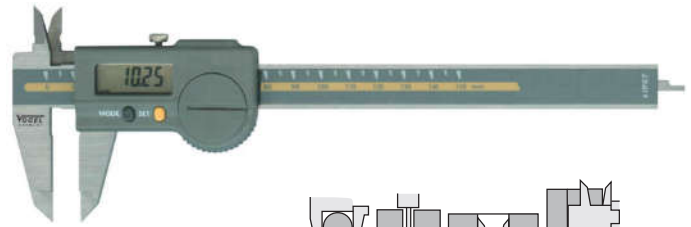

		INOX			
		DIN		CC	WARRANTY 3 YEARS

Options



- data transfer via cable, art.-no. 2023101, see page 304
- data transfer via WiFi, art.-no. 2023104 + 2023105, see page 304

ART NO	mm / inch	mm / inch	mm	max. mm	mm	mm	mm	KG	CC
200250	150 / 6	0.01 / 0.0005	0.01	0.02	40	16	flat	0.170	inclusive
200251	200 / 8	0.01 / 0.0005	0.01	0.03	50	19	flat	0.190	inclusive
200252	300 / 12	0.01 / 0.0005	0.01	0.03	64	19	-	0.215	inclusive
200253	150 / 6	0.01 / 0.0005	0.01	0.02	40	16	round	0.170	inclusive

DIGI PLUS-LINE **“Absolute“ Electr. Digital Caliper • IP67**
DIN 876

- standard model, without data output
- with metal housing and metal function buttons
- water- a. coolant proof acc. to DIN 40050 / IEC 60529

- sturdy quality, stainless steel, hardened
- large LCD display with clear reading, 9 mm digit height
- jaws finely ground and lapped
- On/Off button, autom. shutdown, with ABS/INC measuring system
- With locking screw, with screwed battery compartment cover
- mm/inch switchable, zero setting at any position
- incl. 1x 3 V battery (type CR1632, art.-no.. 2002193), with operation manual

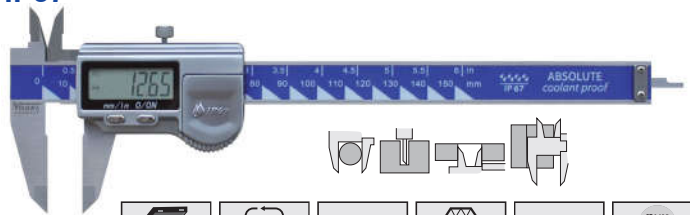

		INOX		ABS/INC	
	DIN		TC	WARRANTY 3 YEARS	



ART NO	mm / inch	mm / inch	mm	max. mm	mm	mm	mm	KG	ART NO CC
202130.2	150 / 6	0.01 / 0.0005	0.01	0.03	40	16	flat	0.205	2094101
202131.2	200 / 8	0.01 / 0.0005	0.01	0.03	50	19.5	flat	0.235	2094101
202132.2	300 / 12	0.01 / 0.0005	0.01	0.03	60	20.5	flat	0.305	2094101

DIGI PLUS-LINE **“Absolute“ Electr. Digital Caliper • IP54**
DIN 862

NEW

- top model for industry purposes
- with optical tolerance alarm by LED signal
- with glass rail for more accuracy
- with data output (micro USB)
- spray water proof acc. to DIN 40050 / IEC 60529

- sturdy quality, stainless steel, hardened
- large LCD display with clear reading, 9 mm digit height
- jaws finely ground and lapped, with fixing screw
- with PRESET/ORIGIN/ABS/INC-system
- On/Off button, autom. power off
- mm/inch switchable, zero setting at any position
- incl. 2x 3 V battery (type CR2032, art.-No. 2002093), with operation manual

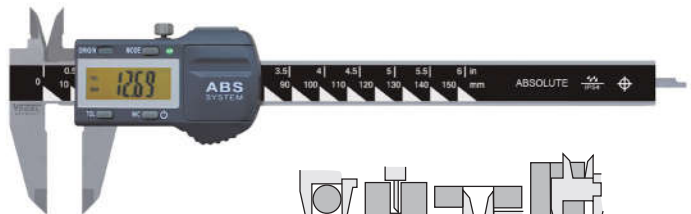

		INOX			ABSOLUTE	ORIGIN
				TC	WARRANTY 3 YEARS	

Options

- data transfer via cable, art.-no. 3420195, see page 304
- data transfer via WiFi, art.-no. 2040102, see page 304
- data transfer via Bluetooth, art.-no. 2090099, see page 304

ART NO	mm / inch	mm / inch	mm	max. mm	mm	mm	mm	KG	ART NO CC
202180	150 / 6	0.01 / 0.0005	0.01	0.02	40	16	flat	0.167	2094101
202181	200 / 8	0.01 / 0.0005	0.01	0.03	50	19.5	flat	0.195	2094101
202182	300 / 12	0.01 / 0.0005	0.01	0.03	60	20.5	flat	0.280	2094101