



**„Absolute“ Electr. Digital Caliper • IP54**  
DIN 862

**NEW**


- top model for industry purpose
- spray water proof acc. to DIN 40050 / IEC 60529
- with Bluetooth data transmission (max. 5m distance)



- mechanic parts stainless, hardened steel
- large LCD display with clear reading, digit height 13 mm
- Absolute-System latest generation, with "ORIGIN"-system
- measuring jaws finely ground and lapped
- On/Off-button, with fixing screw, with thumbroll
- mm/inch switchable, zero-setting at any position
- incl. 2 x 3V battery (type CR2032, art.-no. 2002093), with operation manual

**Option**

- data transfer via Bluetooth, art. no. 2023106, see page 304



		<b>INOX</b>		<b>ABSOLUTE</b>
<b>ORIGIN</b>	Bluetooth			
<b>DIN</b>		<b>TC</b>	<b>WARRANTY 3 YEARS</b>	

ART NO									ART NO CC	
202420	150 / 6	mm / inch	0.01 / 0.0005	0.01	0.02	40	16.5	flat	0.150	2094101
202421	200 / 8	mm / inch	0.01 / 0.0005	0.01	0.02	50	19.5	flat	0.175	2094101
202422	300 / 12	mm / inch	0.01 / 0.0005	0.01	0.03	60	20.5	flat	0.215	2094101




**Electr. Digital Caliper • IP54**  
DIN 862

- top model for industry purposes
- with glass rail for more accuracy
- spray water proof acc. to DIN 40050 / IEC 60529



- sturdy quality, stainless steel, hardened
- large LCD display with clear reading, 9 mm digit height
- jaws finely ground and lapped, with fixing screw
- On/Off button, with ABS/INC measuring system
- graduation in mm or inch, zero setting at any position
- incl. 1x 3 V battery (type CR2032, art.-no.: 2002093), with operation manual




		<b>INOX</b>		
<b>ABS/INC</b>			<b>DIN</b>	
	<b>TC</b>	<b>WARRANTY 3 YEARS</b>		

ART NO									ART NO CC	
202160.2	150 / 6	mm / inch	0.01 / 0.0005	0.01	0.02	40	16	flat	0.160	2094101
202161.2	200 / 8	mm / inch	0.01 / 0.0005	0.01	0.03	50	19.5	flat	0.195	2094101
202162.2	300 / 12	mm / inch	0.01 / 0.0005	0.01	0.03	60	20.5	flat	0.230	2094101




**Electr. Digital Caliper**  
DIN 862

- top model for professional workshop use
- with glass rail for more accuracy
- housing with metal cover and metal buttons
- with data output (mini USB)

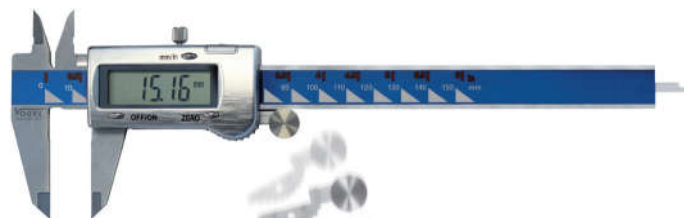

- sturdy quality, stainless steel, hardened
- with or without thumbroll (included, for self installation)
- large LCD display with clear reading, 9 mm digit height
- jaws finely ground and lapped
- On/Off-button, with flat or round depth gauge
- mm/inch switchable, zero setting at any position
- incl. 1x 3 V battery (type CR2032, art.-no.: 2002093), with operation manual

*with removeable thumbroll*



		<b>INOX</b>		
	<b>DIN</b>		<b>TC</b>	<b>WARRANTY 2 YEARS</b>

**Option**

- data transfer via cable, art.-no. 209001, see page 304

ART NO									ART NO CC	
202040.3	150 / 6	mm / inch	0.01 / 0.0005	0.01	0.02	40	16.5	flat	0.165	2094101
202041.3	200 / 8	mm / inch	0.01 / 0.0005	0.01	0.03	50	19.5	flat	0.195	2094101
202042.3	300 / 12	mm / inch	0.01 / 0.0005	0.01	0.03	60	20.5	flat	0.230	2094101
202043.3	150 / 6	mm / inch	0.01 / 0.0005	0.01	0.02	40	16.5	round	0.165	2094101