
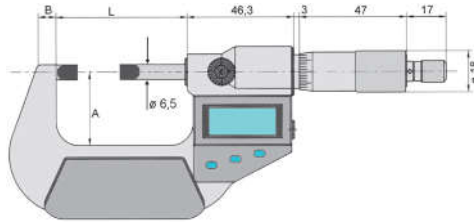


DIGI PLUS-LINE **Electr. Digital Micrometer • IP40**
DIN 863

- dust proof acc. to DIN 40050 / IEC 60529
- to measure small penetrations, grooves, etc.
- Absolute Measurement System (ABS-system)
- with data output RS232 C
- LCD display, with clear reading, digit height 7 mm, mm/inch switchable
- drum with metric scale
- frame lacquered, with insulated plates
- non-rotating spindle with blade measuring faces
- ABS/INC measurement system
- zero setting at any position, On/Off button
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure
- incl. 1x 1.5 V battery (type LR44, art.-no.: 2020192/B), with operation manual
- from up 25 mm with setting gauge

Option

- data transfer via cable, art.-no. 2323100, see page 304




ART NO	mm / inch	mm / inch	A mm	B mm	S mm	T mm	L mm	max. mm		ART NO CC
232381	0 - 25 / 0 - 1	0.001 / 0.00005	26.5	6	0.75	6.5	57.0	0.002	0.275	2394000
232382	25 - 50 / 1 - 2	0.001 / 0.00005	32.0	8	0.75	6.5	82.0	0.002	0.325	2394001
232383	50 - 75 / 2 - 3	0.001 / 0.00005	44.5	8	0.75	6.5	107.0	0.003	0.465	2394001
232384	75 - 100 / 3 - 4	0.001 / 0.00005	57.0	8	0.75	6.5	132.6	0.003	0.560	2394001

DIGI PLUS-LINE **Electr. Digital Micrometer**

- for measuring pipe wall thicknesses etc.
- Absolute Measurement System (ABS-system)
- with data output RS232 C
- LCD display, with clear reading, digit height 7 mm, mm/inch switchable
- frame lacquered, with insulated plates, carbide surface, hardened anvil
- ABS/INC measurement system
- zero setting at any position, On/Off button
- locking wheel for quick and precise fixing
- with ratchet for constant measuring pressure
- incl. 1x 1.5 V battery (type LR44, art.-no.: 2020192/B), with operation manual

Option

- data transfer via cable, art.-no. 2323100, see page 304

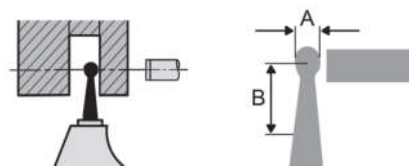

ART NO	mm / inch	mm / inch	ø mm	A ø mm	B mm	max. mm		ART NO CC
232813	0 - 25 / 0 - 1	0.001 / 0.00005	18	4.7	25	0.003	0.260	2394000