





Electr. Digital External Quicktest Gauge • IP67 Electr. Digital Internal Quicktest Gauge • IP67

- with extra long contact arms
- with analogous and digital display
- with USB interface and with Mitutoyo interface (as accessories available)
- robust, rugged plastic housing
- LCD-Display with clear digits
- ABS and REL measuring system
- red/green display for tolerance measurement
- with tungsten carbide measuring contact points
- one movable contact arm
- reading in mm/inch
- numeric interval switch, repeatability ± 0.04 mm
- incl. 1x 1.5 V Battery (type AA, art.-no.: 609282), and operation manual

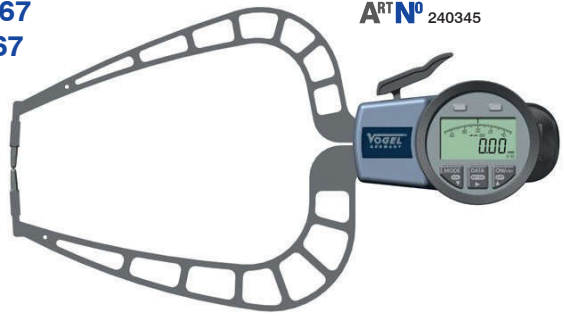

ART No 240345

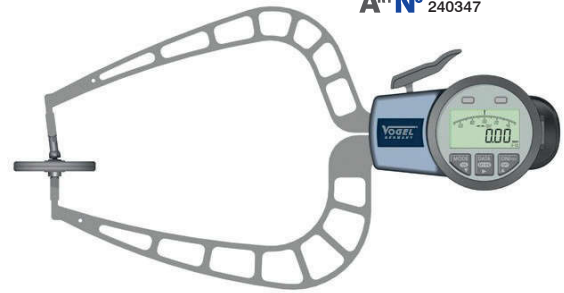

ART No 240347




ART No 240337



form of measuring contact points internal / external

form K carbide ball $\varnothing 1.5$ mm	form L carbide ball $\varnothing 2.0$ mm	form E carbide $\varnothing 5$ mm	form M carbide ball $\varnothing 5$ mm	form D disc $\varnothing 50$ mm

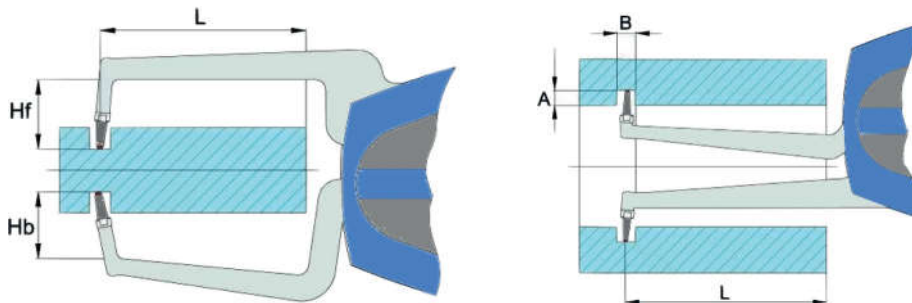

ART No	mm	mm	form	L mm	Hb mm	Hf mm	F min. N	F max. N	max. mm		
external quicktest gauge											
240345	0 - 50	0.02	E	180	25.3	25.3	0.9	1.2	0.06	0.470	inclusive
240347	0 - 50	0.02	D	180	27.2	19.5	0.6	1.0	0.08	0.470	inclusive
internal quicktest gauge											
240336	15 - 65	0.02	K	175	4.5	2.5	1.0	1.2	0.06	0.440	inclusive
240337	40 - 90	0.02	L	195	8.0	4.0	1.0	1.2	0.06	0.440	inclusive

1
2
3
4d
5
6
7
8
9
10
11